


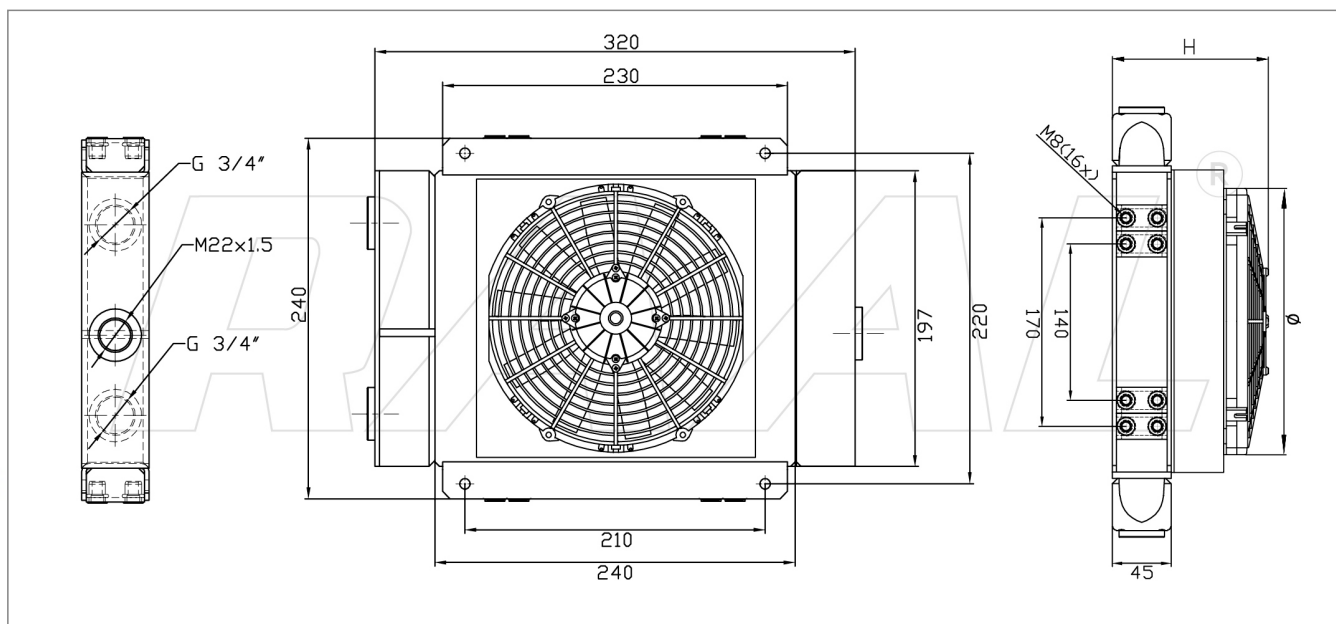

Gamma Oil Coolers

Product Code	Type of Setting	Overall H	Fan diameter	Fan Power m3/h	M.R. dm3	Power Consumpt.
RU0100620000	UNCOVERED	45	-	-	2,13	-
RU0100620011	12V Suct.	140	190	446	2,13	6,4 A
RU0100620012	12V Blow.	140	190	497	2,13	6,4 A
RU0100620021	24V Suct.	140	190	419	2,13	2,8 A
RU0100620022	24V Blow.	140	190	505	2,13	3,3 A
RU0100620031 [*]	230V-50/60Hz Suct.	135	200	1025	2,13	0,34 A
RU0100620032 [*]	230V-50/60Hz Blow.	135	200	1025	2,13	0,34 A
RU0100620041	230/400V-50/60Hz 3FN Suct.	135	200	1020	2,13	0,13 A
RU0100620042	230/400V-50/60Hz 3FN Blow.	135	200	1020	2,13	0,13 A
RU0100620051	Pred. Hydraulic. Suct. (Supp. G1)	185	195	958	2,13	0,7 kW
RU0100620052	Pred. Hydraulic. Blow. (Supp. G1)	185	195	958	2,13	0,7 kW

[*] In SINGLE PHASE models (*31/*32), ADJUSTABLE THERMOSTAT 0-90° on request.



Technical Specification

Minimum Range

Kw 2,8 : 5 lt

Maximum Range

Kw 5,9 : 40 lt

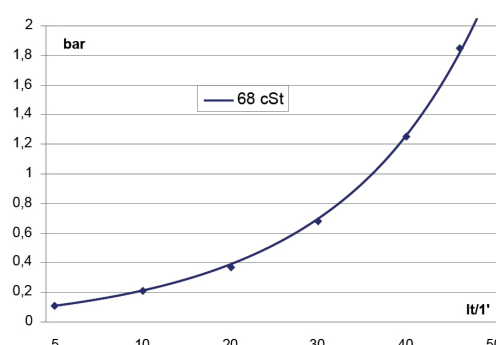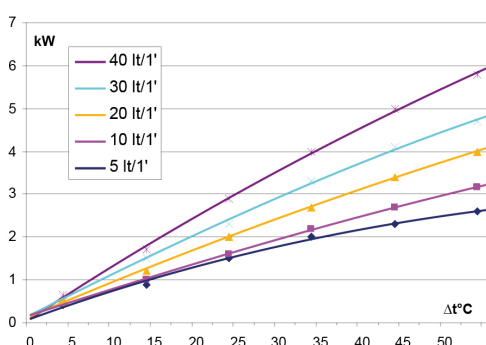

The overall dimensions and the technical characteristics are to be considered indicative, dealing with standar products in constant evolution.

