


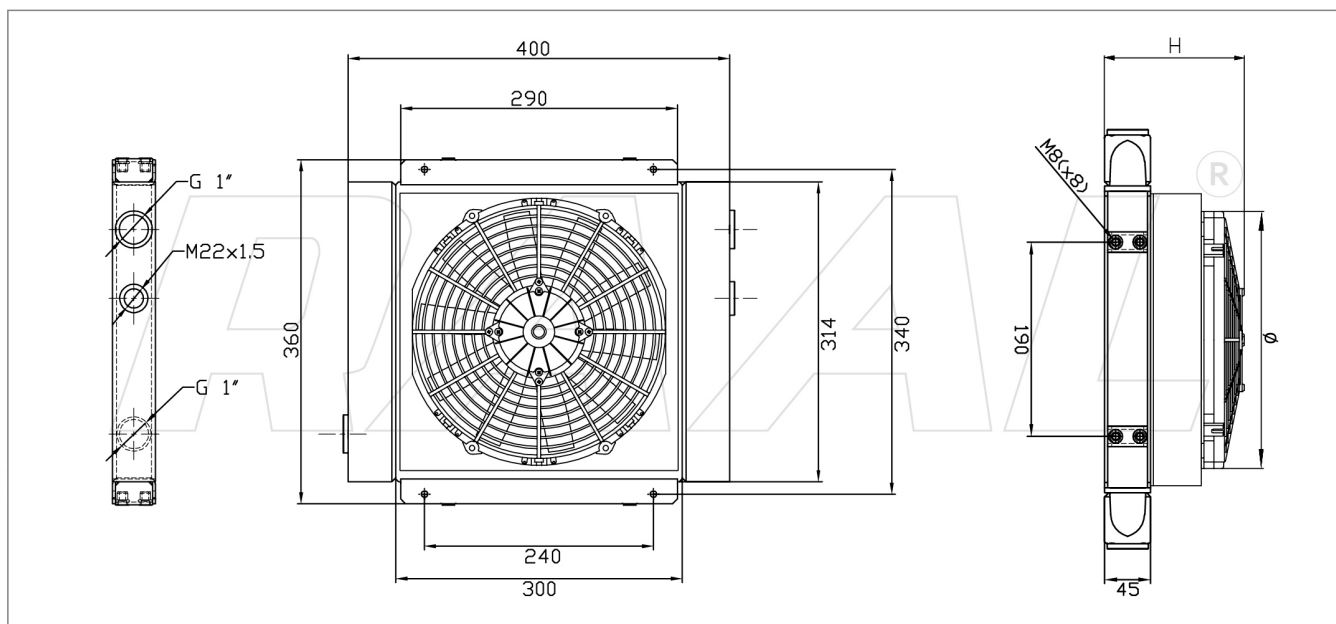

Gamma Oil Coolers

Product Code	Type of Setting	Overall H	Fan diameter	Fan Power m3/h	M.R. dm3	Power Consumpt.
RU0100630000	UNCOVERED	45	-	-	4,24	-
RU0100630011	12V Suct.	210	305	1839	4,24	16,5 A
RU0100630012	12V Blow.	210	305	1736	4,24	14,9 A
RU0100630021	24V Suct.	210	305	2161	4,24	10,3 A
RU0100630022	24V Blow.	210	305	2050	4,24	9,1 A
RU0100630031 [*]	230V-50/60Hz Suct.	175	300	3745	4,24	1,55 A
RU0100630032 [*]	230V-50/60Hz Blow.	175	300	3745	4,24	1,55 A
RU0100630041	230/400V-50/60Hz 3FN Suct.	175	300	3350	4,24	0,48 A
RU0100630042	230/400V-50/60Hz 3FN Blow.	175	300	3350	4,24	0,48 A
RU0100630051	Pred. Hydraulic. Suct. (Supp. G2)	225	300	3080	4,24	0,41 kW
RU0100630052	Pred. Hydraulic. Blow. (Supp. G2)	225	300	3080	4,24	0,41 kW

[*] In SINGLE PHASE models (*31/*32), ADJUSTABLE THERMOSTAT 0-90° on request.



Technical Specification

Minimum Range

Kw 7 : 20 lt

Maximum Range

Kw 13 : 120 lt

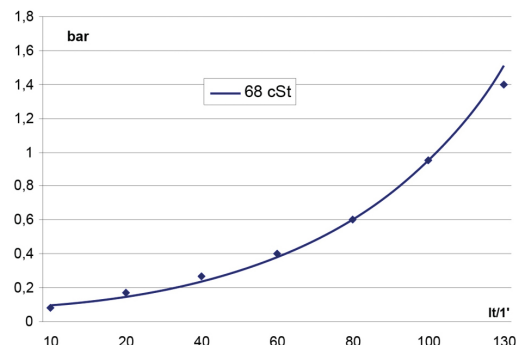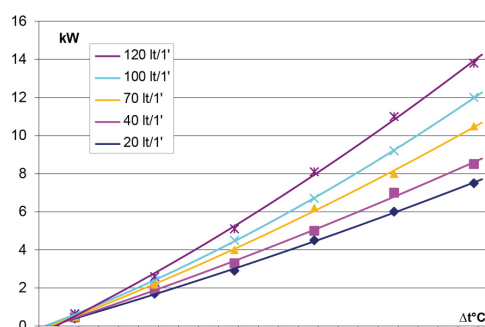

The overall dimensions and the technical characteristics are to be considered indicative, dealing with standard products in constant evolution.

