


GRD 150

Oil Coolers GR S/D Series

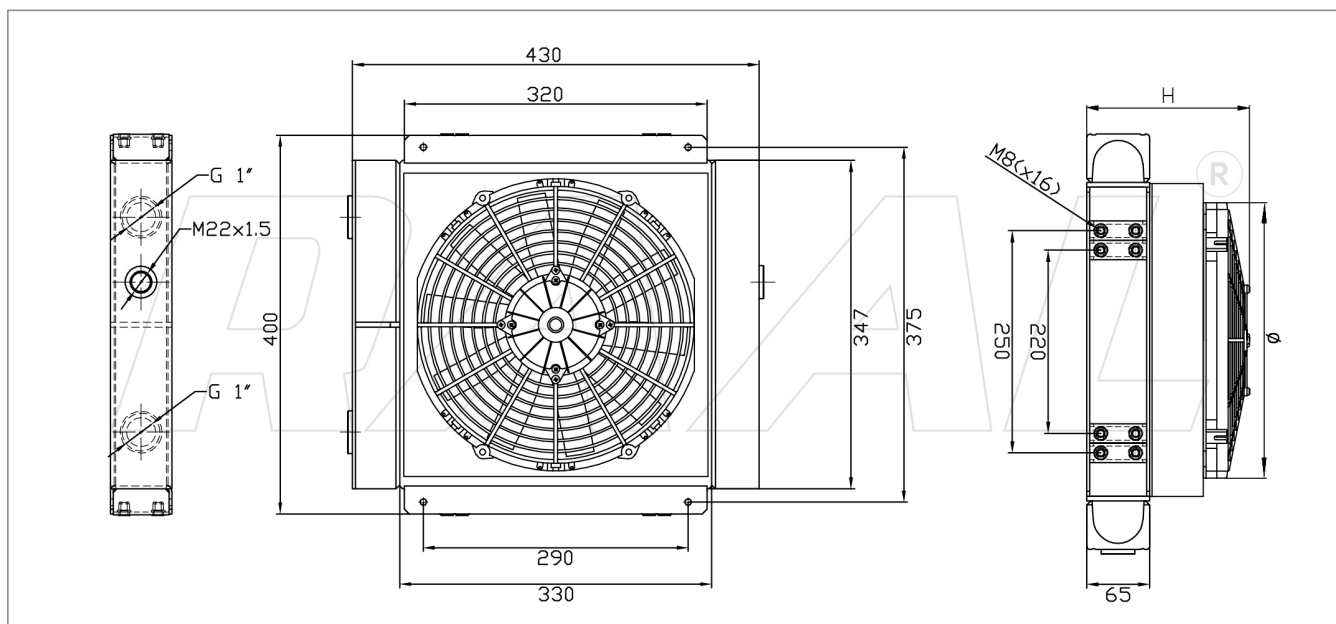

Gamma Oil Coolers

Product Code	Type of Setting	Overall H	Fan diameter	Fan Power m3/h	M.R. dm3	Power Consumpt.
RU0100660000	UNCOVERED	65	-	-	7,44	-
RU0100660011	12V Suct.	230	305	1839	7,44	16,5 A
RU0100660012	12V Blow.	230	305	1736	7,44	14,9 A
RU0100660021	24V Suct.	230	305	2161	7,44	10,3 A
RU0100660022	24V Blow.	230	305	2050	7,44	9,1 A
RU0100660031 [*]	230V-50/60Hz Suct.	195	300	3745	7,44	1,55 A
RU0100660032 [*]	230V-50/60Hz Blow.	195	300	3745	7,44	1,55 A
RU0100660041	230/400V-50/60Hz 3FN Suct.	195	300	3350	7,44	0,48 A
RU0100660042	230/400V-50/60Hz 3FN Blow.	195	300	3350	7,44	0,48 A
RU0100660051	Pred. Hydraulic. Suct. (Supp. G2)	245	300	3080	7,44	0,41 kW
RU0100660052	Pred. Hydraulic. Blow. (Supp. G2)	245	300	3080	7,44	0,41 kW

[*] In SINGLE PHASE models (*31/*32), ADJUSTABLE THERMOSTAT 0-90° on request.



Technical Specification

Minimum Range

Kw 15 : 15 lt

Maximum Range

Kw 25 : 70 lt

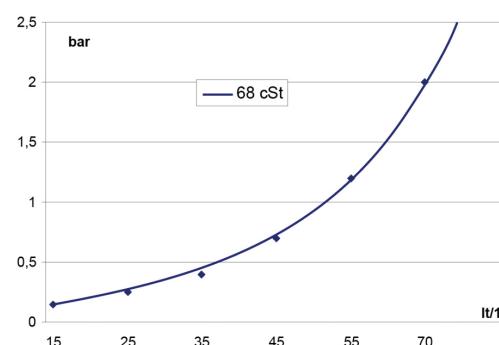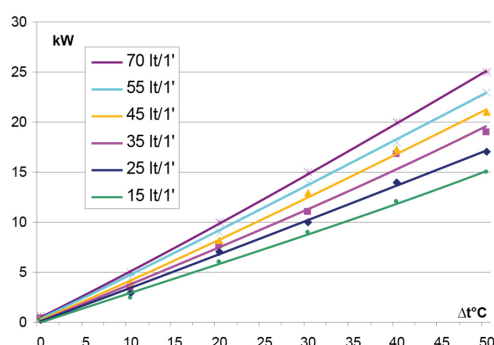

The overall dimensions and the technical characteristics are to be considered indicative, dealing with standard products in constant evolution.

