


GRD 300

Oil Coolers GR S/D Series

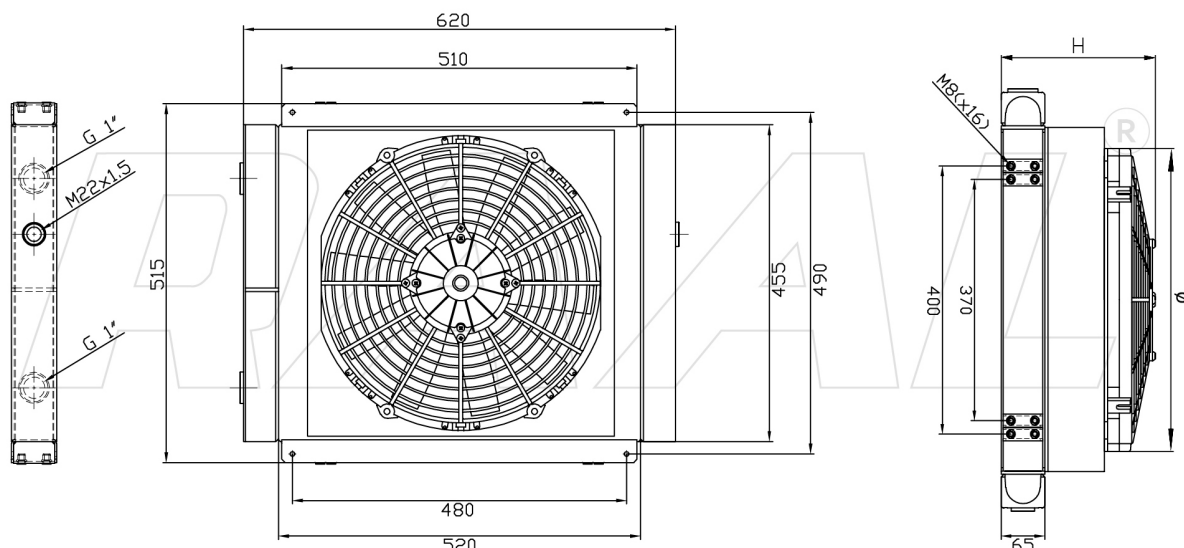

Gamma Oil Coolers

Product Code	Type of Setting	Overall H	Fan diameter	Fan Power m3/h	M.R. dm3	Power Consumpt.
RU0100700000	UNCOVERED	65	-	-	15,38	-
RU0100700011	12V Suct.	230	385	2212	15,38	16,0 A
RU0100700012	12V Blow.	230	385	2412	15,38	16,2 A
RU0100700021	24V Suct.	230	385	2577	15,38	9,3 A
RU0100700022	24V Blow.	230	385	2609	15,38	9,0 A
RU0100700031 [*]	230V-50/60Hz Suct.	230	400	4950	15,38	1,06 A
RU0100700032 [*]	230V-50/60Hz Blow.	230	400	4950	15,38	1,06 A
RU0100700041	230/400V-50/60Hz 3FN Suct.	230	400	4615	15,38	0,39 A
RU0100700042	230/400V-50/60Hz 3FN Blow.	230	400	4615	15,38	0,39 A
RU0100700051	Pred. Hydraulic. Suct. (Supp. G2)	250	400	7050	15,38	1,5 kW
RU0100700052	Pred. Hydraulic. Blow. (Supp. G2)	250	400	7050	15,38	1,5 kW

[*] In SINGLE PHASE models (*31/*32), ADJUSTABLE THERMOSTAT 0-90° on request.



Technical Specification

Minimum Range

Kw 13 : 20 lt

Maximum Range

Kw 27 : 100 lt

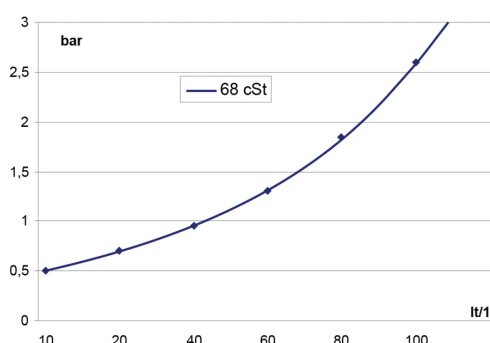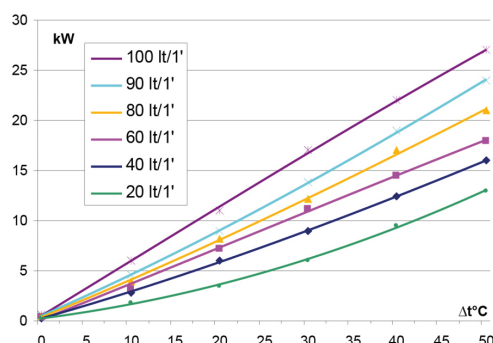

The overall dimensions and the technical characteristics are to be considered indicative, dealing with standard products in constant evolution.

