




Codice Prodotto	Tipologia Allestimento	Ingombro H	Ventola diam.	Portata Ventola m3/h	M.R. dm3	Potenza Assorbita
RUT105700000	NUDO	98	-	-	21,06	-
RUT105700011	12V Asp.	265	385	2212	21,06	16,0 A
RUT105700012	12V Soff.	265	385	2412	21,06	16,2 A
RUT105700021	24V Asp.	265	385	2577	21,06	9,3 A
RUT105700022	24V Soff.	265	385	2609	21,06	9,0 A
RUT105700031	230V-50/60Hz Asp.	270	400	4950	21,06	1,06 A
RUT105700032	230V-50/60Hz Soff.	270	400	4950	21,06	1,06 A
RUT105700041	230/400V-50/60Hz 3FN Asp.	270	400	4615	21,06	0,39 A
RUT105700042	230/400V-50/60Hz 3FN Soff.	270	400	4615	21,06	0,39 A
RUT105700051	Pred. Hydraulic. Asp. (Supp. G2)	285	400	7050	21,06	1,5 kW
RUT105700052	Pred. Hydraulic. Soff. (Supp. G2)	285	400	7050	21,06	1,5 kW

Kw 37 : 200 lt

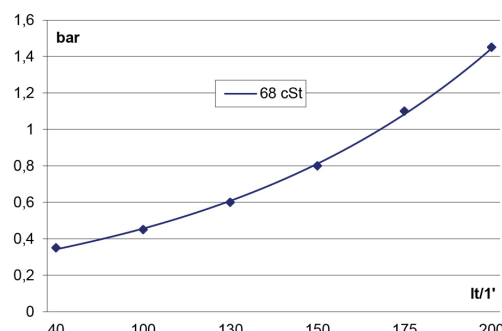

Le dimensioni di ingombro e le caratteristiche tecniche sono da considerarsi indicative, trattandosi di prodotti standard in continua evoluzione.

