


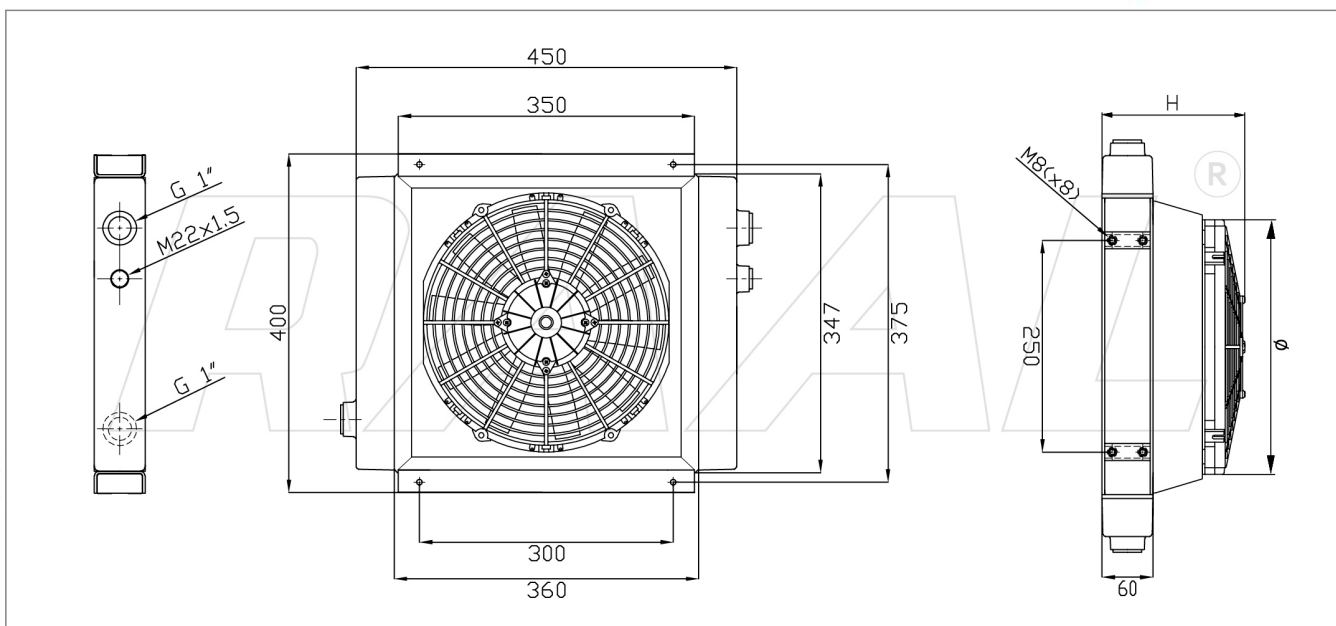

### Gamma Oil Coolers

| Product Code | Type of Setting                   | Overall H | Fan diameter | Fan Power m3/h | M.R. dm3 | Power Consumpt. |
|--------------|-----------------------------------|-----------|--------------|----------------|----------|-----------------|
| RUV100650000 | UNCOVERED                         | 60        | -            | -              | 7,87     | -               |
| RUV100650011 | 12V Suct.                         | 225       | 305          | 1839           | 7,87     | 16,5 A          |
| RUV100650012 | 12V Blow.                         | 225       | 305          | 1736           | 7,87     | 14,9 A          |
| RUV100650021 | 24V Suct.                         | 225       | 305          | 2161           | 7,87     | 10,3 A          |
| RUV100650022 | 24V Blow.                         | 225       | 305          | 2050           | 7,87     | 9,1 A           |
| RUV100650031 | 230V-50/60Hz Suct.                | 190       | 300          | 3745           | 7,87     | 1,55 A          |
| RUV100650032 | 230V-50/60Hz Blow.                | 190       | 300          | 3745           | 7,87     | 1,55 A          |
| RUV100650041 | 230/400V-50/60Hz 3FN Suct.        | 190       | 300          | 3350           | 7,87     | 0,48 A          |
| RUV100650042 | 230/400V-50/60Hz 3FN Blow.        | 190       | 300          | 3350           | 7,87     | 0,48 A          |
| RUV100650051 | Pred. Hydraulic. Suct. (Supp. G2) | 240       | 300          | 3080           | 7,87     | 0,41 kW         |
| RUV100650052 | Pred. Hydraulic. Blow. (Supp. G2) | 240       | 300          | 3080           | 7,87     | 0,41 kW         |



### Technical Specification

Minimum Range

Kw 15 : 30 lt

Maximum Range

Kw 25 : 140 lt

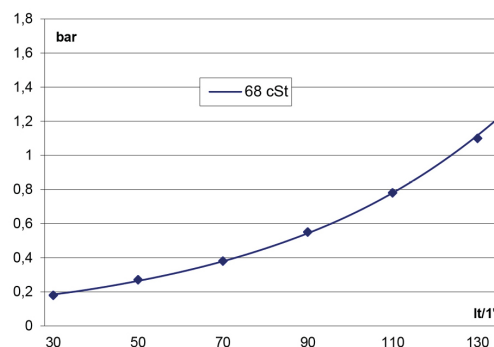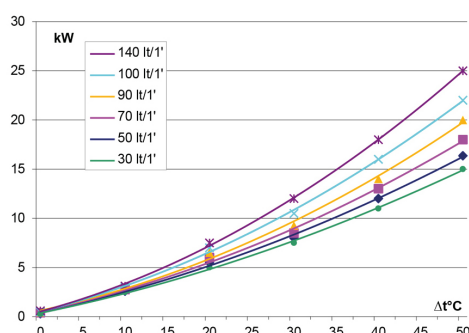

The overall dimensions and the technical characteristics are to be considered indicative, dealing with standard products in constant evolution.

